

SMD Unshielded Power Inductors - SCD Series

SCD Series




Various high power surface mountable type inductors are superior to high saturation. These are also magnetic shielded type for consideration against radiation.

Features

- RoHS compliant
- High saturation open type wire wound power Inductor.
- Suitable for large currents.
- Ideal for a variety of DC – DC converter inductor applications.
- Available on tape and reel for auto surface mounting.


Product Identification

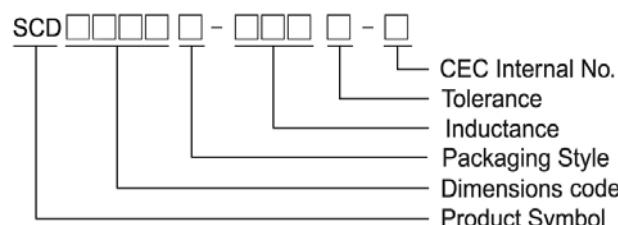


- Packaging: T : Tape and Reel

Shapes and Dimensions


SCD 03011 ~ 1006

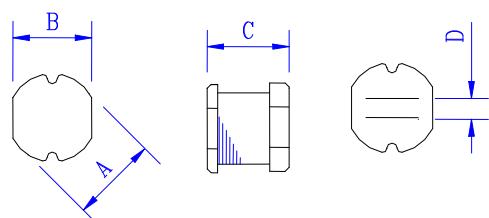

SCDR105B

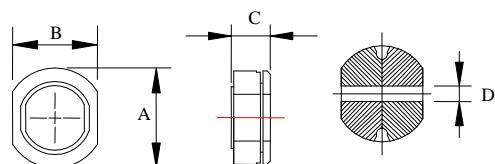

SCD 1307

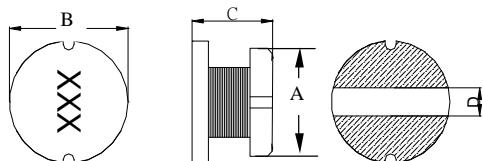

Dimensions in mm

TYPE	A	B	C	D
SCD 03011	3.5 ± 0.3	3.0 ± 0.3	1.1 ± 0.3	1.0 TYP
SCD 03015	3.3 ± 0.3	3.0 ± 0.3	1.5 ± 0.3	1.0 TYP
SCD 03021	3.3 ± 0.3	3.0 ± 0.3	2.1 ± 0.3	1.0 TYP
SCD 0403	4.5 ± 0.3	4.0 ± 0.3	3.2 ± 0.3	1.2
SCD 0501	5.8 ± 0.3	5.2 ± 0.3	2.2^{+0}	2.0TYP
SCD 0502	5.8 ± 0.3	5.2 ± 0.3	2.5 ± 0.3	2.0 TYP
SCD 0503	5.8 ± 0.3	5.2 ± 0.3	3 ± 0.3	2.0 TYP
SCD 0504	5.8 ± 0.3	5.2 ± 0.3	4.5 ± 0.4	1.3
SCD 0506	5.8 ± 0.3	5.2 ± 0.3	6.0 ± 0.4	1.3
SCD 0703	7.8 ± 0.3	7.0 ± 0.3	3.5 ± 0.3	2.1
SCD 0705	7.8 ± 0.3	7.0 ± 0.3	5.0 ± 0.3	2.1
SCD 0706	7.8 ± 0.3	7.0 ± 0.3	6.0 ± 0.3	2.1
SCD 1004	10.0 ± 0.3	9.0 ± 0.3	4.0 ± 0.5	2.1
SCD 1005	10.0 ± 0.4	9.0 ± 0.4	5.4 ± 0.4	2.1
SCD 1006	10.0 ± 0.4	9.0 ± 0.4	6.5 ± 0.4	2.1
SCDR 105B	10.0 ± 0.4	9.0 ± 0.4	5.0 ± 0.5	2.4
SCD 1307	13.0 ± 0.5	13.0 ± 0.5	7.0 ± 0.3	5 TYP



CHILISIN ELECTRONICS CORP.


SMD Unshielded Power Inductors - SCD Series

Recommended Pattern

SCD 1307

Dimensions in mm


Dim	A	B	C
1307	14	4.5	14



The diagram shows two views of the component footprint. The top view is a rectangle with width A and height C. The bottom view is a smaller rectangle with width A and height B. Dimension lines indicate the widths A and B, and the height C.

SCD 03011~SCDR105B

Dimensions in mm



Dim	SCD 03011	SCD 03015	SCD 03021	SCD 0403	SCD 0501	SCD 0502	SCD 0503	SCD 0504	SCD 0506	SCD 0703	SCD 0705	SCD 0706	SCD 1004	SCD 1005	SCD 1006	SCDR 105B
A	4.5	4.5	4.5	5.5	6.8	6.8	6.8	6.8	6.8	8.8	8.8	8.8	11	11	11	12.5
B	1.5	1.0	1.0	1.2	2.0	2.0	2.0	1.3	1.3	2.1	2.1	2.1	2.1	2.1	2.1	2.5

PAD LAYOUT

 CHILISIN

CHILISIN ELECTRONICS CORP.

SMD Unshielded Power Inductors - SCD Series

Standard Specifications

Stamp	Inductance (μ H)	D.C.R (Ω) Max															
		SCD 03011	SCD 03015	SCD 03021	SCD 0403	SCD 0501	SCD 0502	SCD 0503	SCD 0504	SCD 0506	SCD 0703	SCD 0705	SCD 0706	SCD 1004	SCD 1005	SCD 1006	SCDR 105B
1R0	1.0	0.084	0.126	0.07	0.033	0.034	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	
1R2	1.2			0.09	0.038	0.048	0.04										
1R4	1.4																
1R5	1.5																
1R8	1.8			0.11	0.042	0.062	0.05	0.03									
2R2	2.2	0.18	0.10±30%	0.13	0.047	0.064	0.06	0.03	0.07	0.02	0.03	0.04	0.04	0.03	0.04	0.04	0.04
2R7	2.7			0.14	0.052	0.078	0.07	0.04									
3R3	3.3	0.27		0.17	0.058	0.097	0.08	0.05									
3R9	3.9	0.32		0.19	0.076	0.105	0.09	0.06									
4R7	4.7	0.33	0.15±30%	0.21	0.094	0.134	0.14	0.07									
5R6	5.6	0.48		0.22	0.101	0.170	0.15	0.08	0.10	0.08	0.09	0.04	0.04	0.03	0.037	0.06	0.07
6R8	6.8	0.56		0.25	0.117	0.187	0.16	0.09									
8R2	8.2	0.62		0.28	0.132	0.225	0.17	0.10									
100	10	0.90	0.30±30%	0.32	0.182	0.255	0.18	0.12									
120	12	1.00		0.35	0.210	0.292	0.20	0.13									
150	15	1.10	0.58±30%	0.40	0.235	0.360	0.22	0.15	0.14		0.10	0.09	0.08	0.07	0.080		0.07
180	18	1.24		0.48	0.338	0.430	0.25	0.22	0.15		0.11	0.10		0.08	0.090		0.08
220	22	1.40	0.71±30%	0.58	0.378	0.492	0.35	0.22	0.18	0.165	0.13	0.11		0.09	0.100		0.08
270	27	2.18		0.65	0.522	0.603	0.45	0.26	0.20		0.15	0.12		0.10	0.110		0.10
330	33	2.54	1.10±30%	0.80	0.540	0.796	0.56	0.33	0.23		0.17	0.13	0.14	0.12	0.120		0.11
390	39	2.80		0.90	0.587	0.897	0.69	0.42	0.32		0.22	0.16		0.15	0.140		0.12
470	47	3.10	1.30±30%	1.19	0.844	1.020	0.72	0.50	0.37		0.25	0.18		0.17	0.170		0.14
500	50	3.20		1.22		1.040					0.28	0.24		0.20	0.190		0.19
560	56	3.50		1.27	0.937	1.164	0.84	0.55	0.42		0.33	0.28		0.22	0.220		0.21
680	68	5.80	2.20±30%	1.73	1.117	1.220	0.90	0.65	0.46								
750	75	6.10		1.90		1.340											
820	82	6.60		1.99		1.570	1.20	0.80	0.60		0.41	0.37		0.30	0.25		0.28
101	100		3.50±30%	2.52	2.000	1.800	1.30	0.90	0.70		0.48	0.43		0.34	0.35		0.34
121	120			2.90		2.000	1.38	1.00	0.93		0.54	0.47		0.40	0.40		0.37
151	150			3.36		2.80	1.81	1.30	1.10		0.75	0.64		0.54	0.47		0.51
181	180			5.10		3.15	1.95	1.50	1.38		1.02	0.71		0.62	0.63		0.57
221	220			5.80		4.40	3.00	2.00	1.57		1.20	0.96		0.72	0.73		0.78
271	270			7.80		6.40	3.20	2.50	1.85		1.31	1.11		0.95	0.97		0.87
301	300			8.10		6.75											
331	330			9.24		7.20	3.82	3.20	2.00		1.50	1.26		1.10	1.15		1.20
391	390			10.14		8.40	4.68	3.50	2.60		1.96			1.24	1.30		1.34
461	460			11.15		12.0		5.10	4.20	3.00				1.53	1.48		1.50
471	470			11.48		12.4		8.50	4.50	4.19				1.90	1.90		
561	560			19.49		13.0											
681	680			22.00		17.0	10.0	6.50	4.44					2.25			
821	820			23.98		19.5	12.0	7.50	5.12					2.55			
102	1000			28.80		24.0	18.0	8.00	10.00								
122	1200																
152	1500																
602	6000															14	
822	8200														50		

Test Freq.(L): SCD03011: (100KHz/1V) SCD03015: (1MHz/1V)
SCD03021/0403/0501/0502/0503: 1.0 ~ 8.2 μ H(7.96MHz/1V), 10 ~ 82 μ H (2.52MHz/1V), 100 ~ 1000 μ H (1KHz/1V).
SCD0504/0506/0703/0705/0706/1004: 1.0 ~ 8.2 μ H(7.96MHz/1V), 10 ~ 82 μ H (2.52MHz/1V), 100 ~ 1000 μ H (1KHz/1V).
SCD1005/1006: 1.0 ~ 8.2 μ H(7.96MHz/1V), 10 ~ 82 μ H (2.52MHz/1V), 100 ~ 1000 μ H (1KHz/1V).
SCDR105B: 10~88 μ H(2.52MHz/1V); 100~470uH (KHz/ 0.25V)
Test Instrument: L: Agilent/ E4980 or HP4284A (over 1MHz), HP4285A (under 1MHz)
DCR: CH502BC ; Rated D.C. Current: HP4284+42841A or WK3260B+WK3265B



CHILISIN ELECTRONICS CORP.

SMD Unshielded Power Inductors - SCD Series

Standard Specifications

Stamp	Inductance (μ H)	Isat (A) Max														
		SCD 03011	SCD 03015	SCD 03021	SCD 0403	SCD 0501	SCD 0502	SCD 0503	SCD 0504	SCD 0506	SCD 0703	SCD 0705	SCD 0706	SCD 1004	SCD 1005	SCD 1006
1R0	1.0	1.80		2.080	3.80	4.00	4.50	4.50								
1R2	1.2															
1R4	1.4			1.860	3.30	3.60	4.00									
1R5	1.5	1.44														
1R8	1.8			1.800	2.91	3.00	3.30	3.70								
2R2	2.2	1.26	0.79	1.390	2.60	2.65	2.94	3.50								
2R7	2.7			1.320	2.43	2.20	2.50	3.20								
3R3	3.3	1.08		1.250	2.15	2.11	2.35	2.80								
3R9	3.9	1.00		1.200	1.98	2.00	2.20	2.60								
4R7	4.7	0.90	0.65	1.130	1.70	1.80	2.00	2.50								
5R6	5.6	0.76		0.910	1.60	1.60	1.80	2.40								
6R8	6.8	0.68		0.850	1.41	1.50	1.70	2.20								
8R2	8.2	0.63		0.820	1.26	1.30	1.40	2.00								
100	10	0.56	0.45	0.740	1.15	1.10	1.20	1.80	1.44		1.44	2.30		2.38	2.60	2.06
120	12	0.52		0.640	1.05	1.05	1.18	1.75	1.40		1.39	2.00		2.13	2.45	1.94
150	15	0.50	0.30	0.600	0.92	1.00	1.15	1.70	1.30		1.24	1.80	2.8	1.87	2.27	1.72
180	18	0.46		0.540	0.84	0.95	1.10	1.60	1.23		1.12	1.60		1.73	2.15	1.58
220	22	0.36	0.25	0.500	0.76	0.90	1.00	1.50	1.11	1.6	1.07	1.50		1.60	1.95	1.42
270	27	0.30		0.430	0.71	0.77	0.86	1.40	0.97		0.94	1.30		1.44	1.76	1.32
330	33	0.28	0.20	0.400	0.64	0.68	0.76	1.10	0.88		0.85	1.20	2.3	1.26	1.50	1.16
390	39	0.26		0.370	0.59	0.67	0.75	1.00	0.80		0.74	1.10		1.20	1.37	1.10
470	47	0.25	0.17	0.360	0.54	0.66	0.73	0.90	0.72		0.68	1.10		1.10	1.28	1.00
500	50	0.24		0.330		0.61										
560	56	0.23		0.310	0.50	0.50	0.55	0.85	0.68		0.64	0.94		1.01	1.17	0.93
680	68	0.20	0.13	0.300	0.460	0.47	0.52	0.80	0.61		0.59	0.85		0.91	1.11	0.85
750	75	0.18		0.290		0.46										
820	82	0.17		0.280		0.45								0.85	1.00	0.79
101	100		0.10	0.250	0.40	0.36	0.40	0.60	0.52		0.51	0.72		0.74	0.97	0.72
121	120			0.200		0.32	0.36	0.58	0.48		0.49	0.66		0.69	0.89	0.63
151	150			0.190		0.270	0.30	0.43	0.40		0.40	0.58		0.61	0.78	0.55
181	180			0.170		0.230	0.26	0.41	0.38		0.36	0.51		0.56	0.72	0.50
221	220			0.160		0.220	0.25	0.38	0.35		0.31	0.49		0.53	0.66	0.47
271	270			0.140		0.190	0.21	0.35	0.29		0.29	0.42		0.45	0.57	0.41
301	300			0.135		0.180										
331	330			0.130		0.16	0.18	0.28	0.28		0.28	0.40		0.42	0.52	0.37
391	390			0.120		0.150	0.16	0.26	0.26		0.36	0.48		0.38	0.48	0.35
461	460			0.090		0.140										
471	470			0.084		0.135	0.15	0.20	0.12		0.34			0.35	0.42	0.33
561	560			0.080		0.130	0.14	0.19	0.10					0.32	0.33	
681	680			0.080		0.120	0.13	0.18	0.08					0.28		
821	820			0.070		0.063	0.07	0.15	0.05					0.24		
102	1000			0.060		0.045	0.05	0.13	0.03							
122	1200		0.05													
152	1500		0.03													
602	6000															
822	8200														0.27	0.20

Tolerance Of Inductors

- SCD03011 1.0 ~ 82 μ H ± 20%
 - SCD03015 2.2 ~ 1500 μ H ± 20%
 - SCD03021 1.0 ~ 1000 μ H ± 20%
 - SCD0403 1.0 ~ 27 μ H ± 20% 33 ~ 100 μ H ±10%
 - SCD0501 1.0 ~ 27 μ H ± 20% 33 ~ 1000 μ H ±10%
 - SCD0502 1.0 ~ 27 μ H ± 20% 33 ~ 1000 μ H ±10%
 - SCD0503 1.0 ~ 27 μ H ± 20% 33 ~ 1000 μ H ±10%
 - SCD0504 1.0~27 μ H±20% 33~47 μ H±15% 56~1000 μ H±10%
 - SCD0506 22 μ H ± 20%
 - SCD0703 10 ~ 27 μ H ± 20% 33 ~ 330 μ H ±10%
 - SCD0705 1.4 ~ 27 μ H ± 20% 33 ~ 470 μ H ±10%
 - SCD0706 15 μ H ± 20% 33 μ H ±10%
 - SCD1004 10 ~ 27 μ H ± 20% 33 ~ 560 μ H ±10%
 - SCD1005 4.7 ~ 27 μ H ± 20% 33 ~ 820 μ H ±10%
 - SCD1005 4.7 ~ 27 μ H ± 20% 33 ~ 820 μ H ± 10%
 - SCD1006 6000 μ H ~ 8200 μ H ±20%
 - SCDR105B 10 ~ 27 μ H ±20% 33~82 μ H ±15% 100~4700 μ H±10%
- Tolerance: K = ±10%, M = ±20%

※ This indicates the value of current when the inductance is 10% lower than its initial value at D.C superposition or D.C current when at $\Delta t = 40^\circ$ whichever is lower



CHILISIN ELECTRONICS CORP.

SMD Shielded Power Inductors – SCD Series

Electrical Characteristics

Part Number	Inductance (μ H)	Tolerance (\pm %)	Q Ref	Q Frequency (MHz)	SRF (MHz) Typ	DC Resistance (m Ω) Typ	Irms (A) Max	Isat (A) Typ
SCD1307T-1R5□-N	1.5	20	20	7.96 / 0.1V	65	5.0	9.50	20.0
SCD1307T-2R2□-N	2.2	20	22	7.96 / 0.1V	50	6.0	9.00	18.0
SCD1307T-2R7□-N	2.7	20	24	7.96 / 0.1V	40	8.0	8.20	16.0
SCD1307T-3R3□-N	3.3	20	26	7.96 / 0.1V	38	8.7	7.50	15.0
SCD1307T-4R7□-N	4.7	20	25	7.96 / 0.1V	36	10	7.00	13.0
SCD1307T-5R6□-N	5.6	20	24	7.96 / 0.1V	28	15	6.50	11.0
SCD1307T-6R8□-N	6.8	20	24	7.96 / 0.1V	26	17	6.00	10.5
SCD1307T-8R2□-N	8.2	20	24	7.96 / 0.1V	24	19	5.80	9.8
SCD1307T-100□-N	10	20	22	2.52 / 0.1V	22	21	5.60	9.2
SCD1307T-120□-N	12	20	25	2.52 / 0.1V	20	30	4.80	8.0
SCD1307T-150□-N	15	20	28	2.52 / 0.1V	17	34	4.50	7.5
SCD1307T-180□-N	18	20	28	2.52 / 0.1V	16	36	4.20	7.0
SCD1307T-220□-N	22	20	40	2.52 / 0.1V	15	47	3.60	6.5
SCD1307T-270□-N	27	20	35	2.52 / 0.1V	11	60	3.30	5.5
SCD1307T-330□-N	33	20 / 10	35	2.52 / 0.1V	10	65	3.10	5.0
SCD1307T-390□-N	39	20 / 10	28	2.52 / 0.1V	9.0	75	2.90	4.6
SCD1307T-470□-N	47	20 / 10	24	2.52 / 0.1V	7.5	82	2.70	4.2
SCD1307T-560□-N	56	20 / 10	22	2.52 / 0.1V	7.2	95	2.50	3.8
SCD1307T-680□-N	68	20 / 10	24	2.52 / 0.1V	7.0	120	2.30	3.5
SCD1307T-820□-N	82	20 / 10	18	2.52 / 0.1V	6.0	140	2.10	3.2
SCD1307T-101□-N	100	20 / 10	25	0.796 / 0.1V	5.8	180	1.90	3.0
SCD1307T-121□-N	120	20 / 10	20	0.796 / 0.1V	5.5	210	1.80	2.8
SCD1307T-151□-N	150	20 / 10	20	0.796 / 0.1V	4.5	250	1.60	2.6
SCD1307T-181□-N	180	20 / 10	18	0.796 / 0.1V	4.0	280	1.50	2.3
SCD1307T-221□-N	220	20 / 10	15	0.796 / 0.1V	3.8	360	1.30	2.1
SCD1307T-271□-N	270	20 / 10	15	0.796 / 0.1V	3.5	410	1.20	1.8
SCD1307T-331□-N	330	20 / 10	15	0.796 / 0.1V	3.2	520	1.10	1.6
SCD1307T-391□-N	390	20 / 10	12	0.796 / 0.1V	2.5	600	1.00	1.5
SCD1307T-471□-N	470	20 / 10	12	0.796 / 0.1V	2.2	720	0.90	1.4
SCD1307T-561□-N	560	20 / 10	10	0.796 / 0.1V	2.0	880	0.85	1.3
SCD1307T-681□-N	680	20 / 10	10	0.796 / 0.1V	1.6	1000	0.80	1.2
SCD1307T-821□-N	820	20 / 10	10	0.796 / 0.1V	1.5	1300	0.75	1.1
SCD1307T-102□-N	1000	20 / 10	10	0.252 / 0.1V	1.4	1600	0.65	1.0

- When ordering, please specify tolerance and packaging codes.
- Inductance tested at 0.1 Vrms, 100KHz.
- Tolerance: K = $\pm 10\%$, M = $\pm 20\%$
- Inductance drop = 10%. Typ at Isat
- $\Delta T = 40^\circ C$ rise typ at Irms.
- Test Instrument: L / Q : Agilent/ E4980 or HP4284A (over 1MHz), HP4285A (under 1MHz)

SRF: HP4286A

RDC: CH502BC

Isat: HP4284+42841A or WK3260B+WK3265B





CHILISIN ELECTRONICS CORP.



SMD Unshielded Power Inductors - SCD Series

Test Instruments : HP4294 Impedance / Material Analyzer



SCD0403

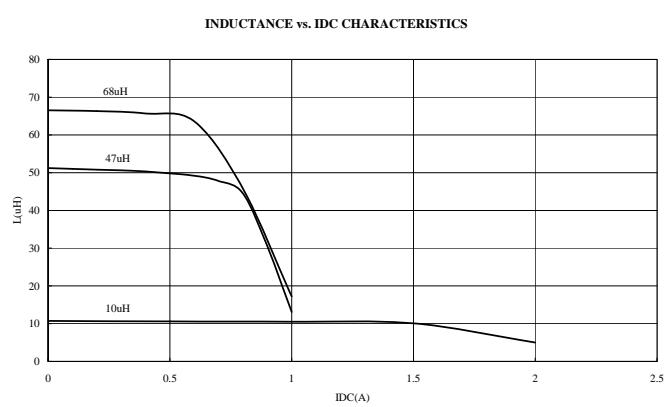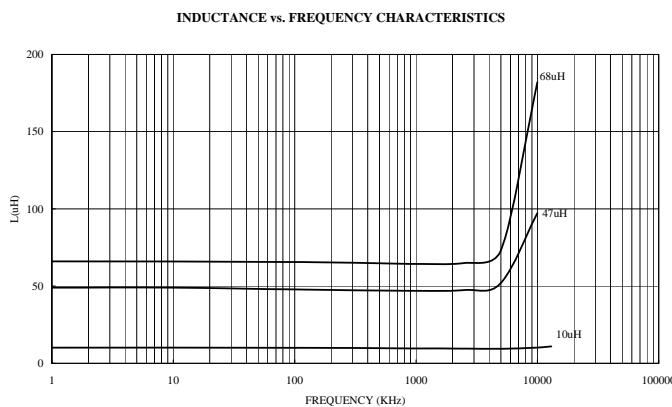

SCD0504

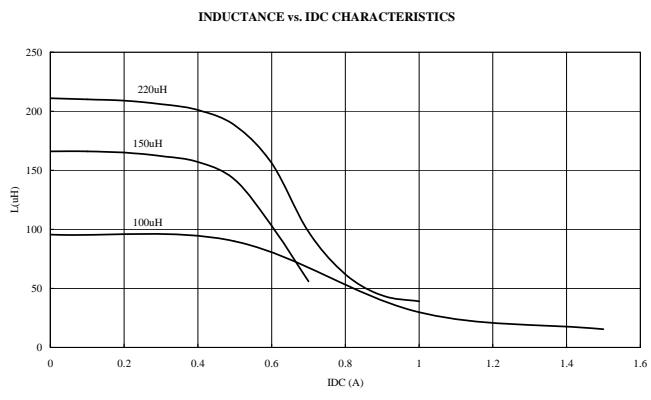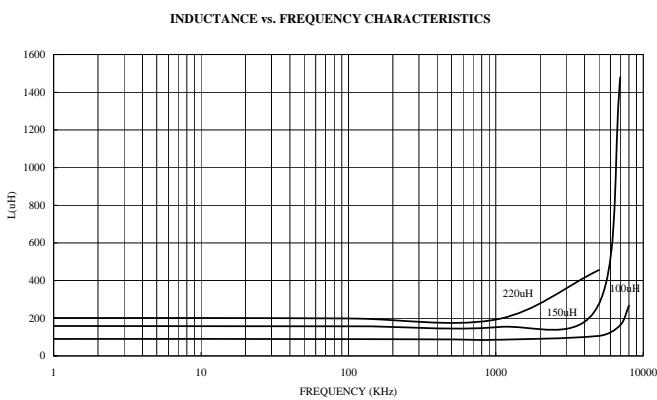

SCD0703

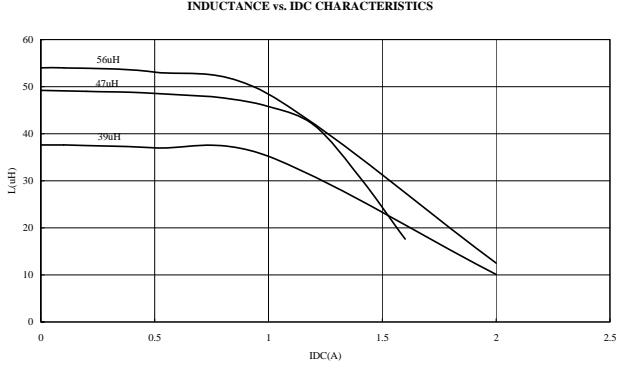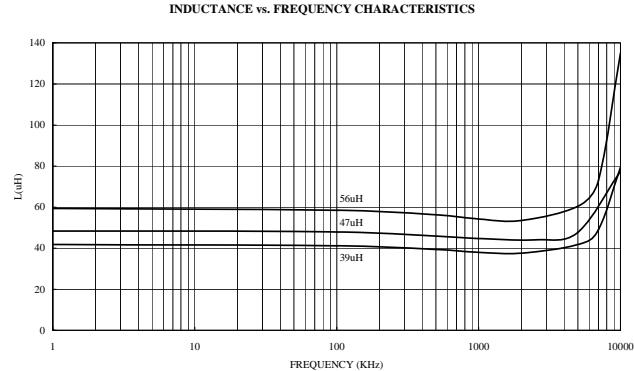


SMD Unshielded Power Inductors - SCD Series


Test Instruments : HP4294 Impedance / Material Analyzer

SCD0705

INDUCTANCE vs. FREQUENCY CHARACTERISTICS

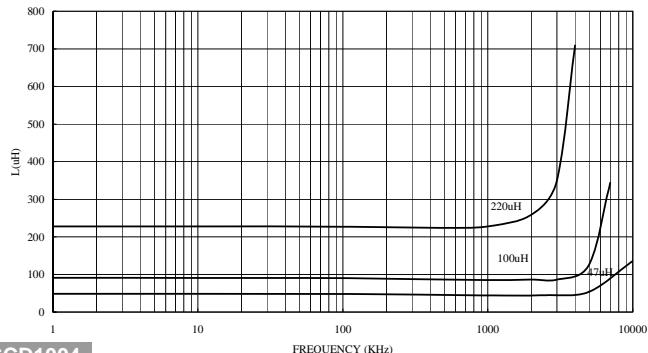


INDUCTANCE vs. IDC CHARACTERISTICS

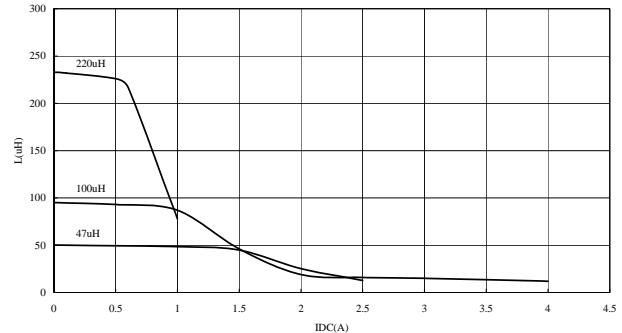


SCD1004

INDUCTANCE vs. FREQUENCY CHARACTERISTICS

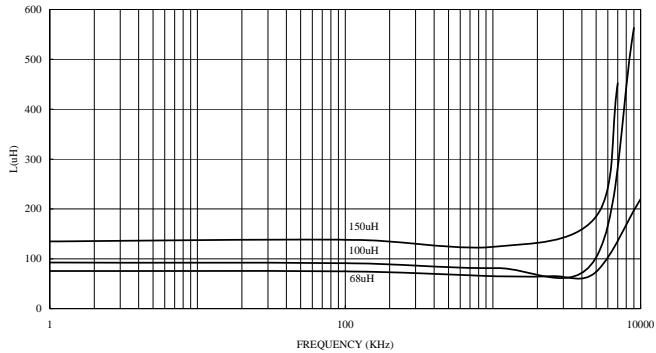


INDUCTANCE vs. IDC CHARACTERISTICS

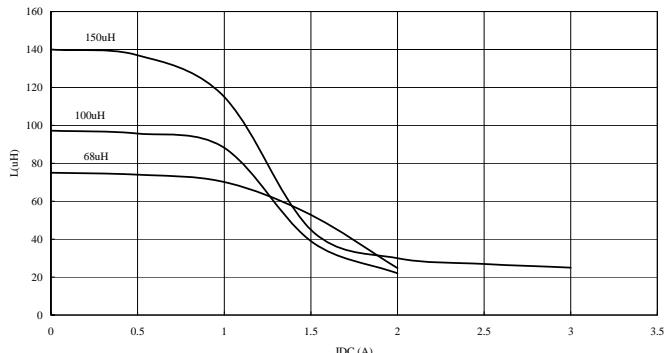


SCD1005

INDUCTANCE vs. FREQUENCY CHARACTERISTICS

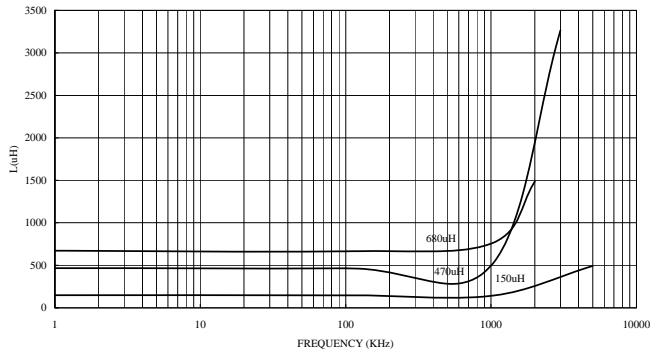


INDUCTANCE vs. IDC CHARACTERISTICS

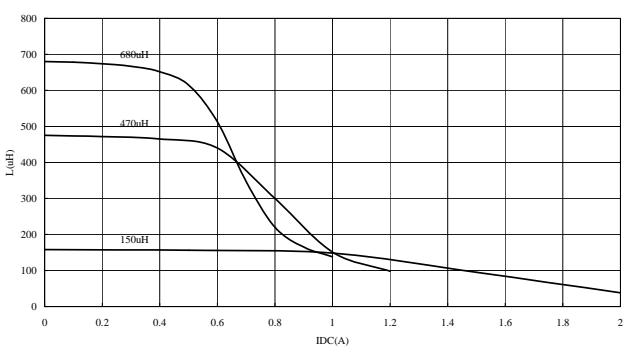


SCDR105B

INDUCTANCE vs. FREQUENCY CHARACTERISTICS

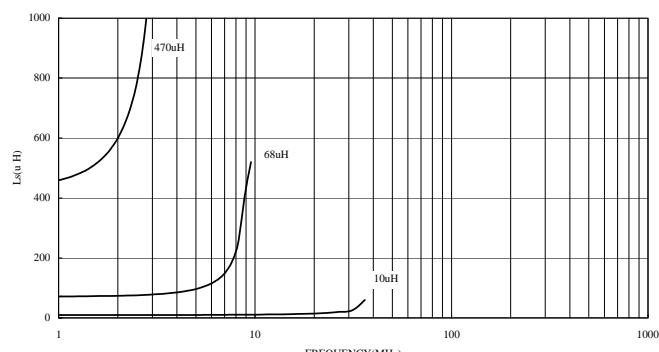


INDUCTANCE vs. IDC CHARACTERISTICS

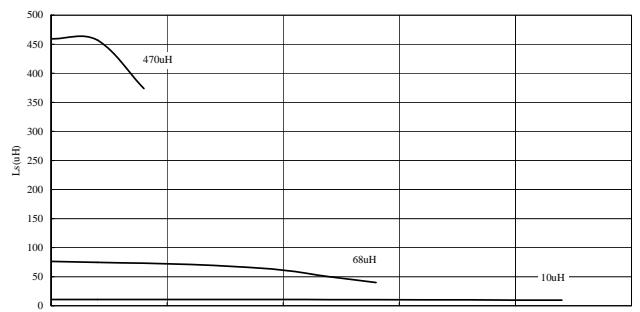


SMD Unshielded Power Inductors - SCD Series

Packaging Specifications


Tape Dimensions

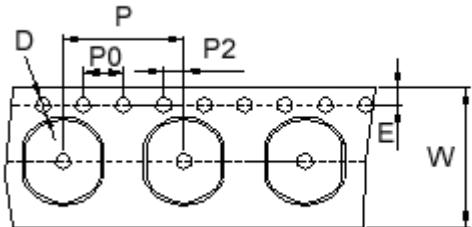

Tape Material

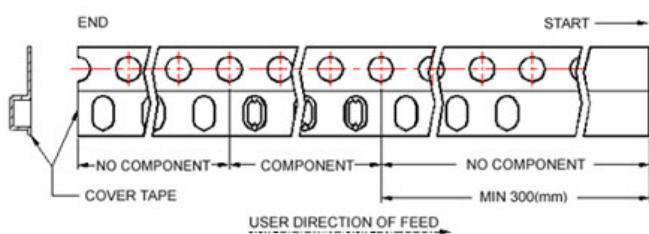

Reel Dimensions

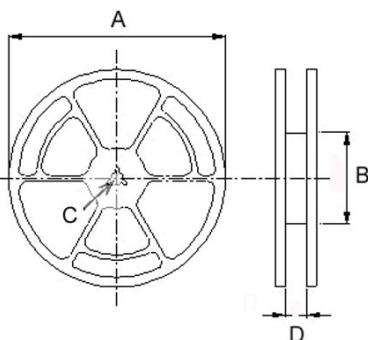

Dimensions in mm

TYPE	Tape Dimensions							Reel Dimensions				Quantity PCS / REEL
	K0	D	E	W	P	P0	P2	A	B	C	D	
SCD03011	1.4	1.50	1.75	12	8	4	2	330	100	13	13.4	3000
SCD03015	1.80	1.55	1.75	12	8	4	2	330	100	13	13.4	3000
SCD03021	2.50	1.55	1.75	12	8	4	2	330	100	13	13.4	3000
SCD0403	3.55	1.55	1.75	12	8	4	2	330	100	13	13.4	2000
SCD0501	2.35	1.55	1.75	12	8	4	2	330	100	13	13.4	2000
SCD0502	3.30	1.50	1.75	16	8	4	2	330	100	13	17.4	2000
SCD0503	3.30	1.50	1.75	16	8	4	2	330	100	13	17.4	2000
SCD0504	4.8	1.55	1.75	16	8	4	2	330	100	13	17.4	1500
SCD0506	6.4	1.55	1.75	16	8	4	2	330	100	13	17.4	1500
SCD0703	3.8	1.55	1.75	16	12	4	2	330	100	13	17.4	1000
SCD0705	5.2	1.55	1.75	16	12	4	2	330	100	13	17.4	700
SCD0706	6.4	1.55	1.75	16	12	4	2	330	100	13	17.4	700
SCD1004	4.5	1.55	1.75	24	12	4	2	330	100	13	24.4	700
SCD1005	5.8	1.55	1.75	24	12	4	2	330	100	13	24.4	700
SCD1006	7.0	1.55	1.75	24	12	4	2	330	100	13	24.4	500
SCDR105B	5.8	1.55	1.75	24	12	4	2	330	100	13	24.4	750
SCD1307	7.4	1.55	1.75	24	16	4	2	330	100	13	24.4	500